

SMOKE, HEAT & CARBON MONOXIDE ALARMS

Our BSI Kitemarked alarms offer complete peace of mind for owner occupied and sheltered housing dwellings. Up to 20 smoke and heat alarms (40 carbon monoxide only) can be connected, up to a maximum run of 150m.



Features

- Designed to detect and raise an alarm for smoke, heat or carbon monoxide gas
- Mains operated with replaceable 9V battery back up
- BS5859-6: 2019 Grade D2 - suitable for owner occupied homes and individual dwellings in sheltered housing
- BSI Kitemarked - high quality products for peace of mind




SMAS-P2

Specification

Material:	ABS
Alarm Grade:	D2
Colour Finish:	White
IP Rating:	SMAC-3 : IP32 / SMAH-2 + SMAS-P2 : IP40
Alarm Sound Level:	85 dB at 3m (SMAC-3 at 1m)
Battery Back:	9V, user replaceable
Battery Life:	1 year in the event of mains failure
Alarm:	Heat - 60°C fixed temperature trigger Smoke - Optical Carbon Monoxide - 50PPM (60-90 mins) 100PPM (10-40 mins), 300PPM (<3mins)
Electrical Class:	Class: II
Guarantee:	5 Years

Dimensions

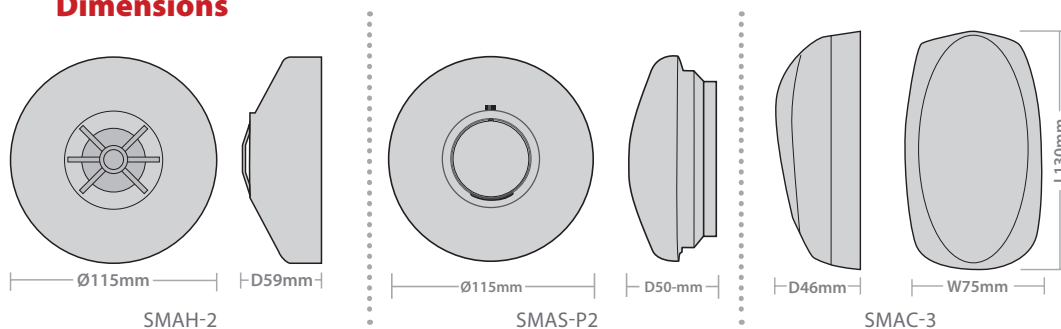

Product Code	Description	Dimensions	Voltage	Weight (Kg)	Barcode
SMAC-3	Carbon Monoxide Alarm	L: 130 x W: 75 x D: 46mm	230V	0.21	5055807617864
SMAH-2	Heat Alarm	Ø: 115mm x D: 59mm	230V	0.16	5055807617871
SMAS-P2	Photoelectric Smoke Alarm	Ø: 115mm x D: 50mm	230V	0.16	5055807617888
SMAB-2	Pattress	Ø: 110 x D: 22mm	-	0.05	5055807617857



www.redarrowelectrical.co.uk

UK
CA

