


Datasheet



**Termination
Technology Ltd**
Quality and Service

HS2.4GREY

**Term Tech Heatshrink 2:1 Ratio 2.4mmØ
Expanded, 1.2mmØ Recovered Grey (Per
Metre)**



The Termination Technology range of thin wall Cross linked Polyolefin Heatshrink is designed for commercial use with common uses including insulation, wire bundling, colour coding and mechanical protection. Available in a range of colours and sizes, all cut to metre as required. Specialist Heatshrink end caps, breakout boots, joints and adhesive lined versions also available from stock.



**Termination
Technology Ltd**
Quality and Service

The company with the **RIGHT** connections at the **RIGHT** price.

Company Registration Number: 05062297

W: www.termtech.co.uk


T: 01179 354 900

E: sales@termtech.co.uk

Termination Technology Ltd, Unit 4C Crofts End Ind Estate, Crofts End Road,
Bristol BS5 7UW



Datasheet



**Termination
Technology Ltd**
Quality and Service

Technical Data

Colour and Material

Material	Crosslinked Polyolefin
Colour	Grey

Durability

Chemical Resistance	Resistant to common fluids and solvents
Fungus Resistance	Tested with no growth occurring

Electrical Ratings

Dielectric Strength (kV/mm)	Min 19.7 Tested to ASTM D-2671
Volume Resistivity (Ohm/cm)	Min 10^{13} Tested to ASTM D-876

Physical Attributes

Adhesive Lined	No
----------------	----


Product Specification

CE Compliant	Yes
ROHS Compliant	Yes

Temperature and Fire Information


Continuous Operating Temperature (°C)	-55 to +135
Shrink Temperature (°C)	+90 to Start Shrinking
Fire Rating	UL224 VW-1; MIL-I-23053/5 Class 1 & 3

Datasheet



**Termination
Technology Ltd**

Quality and Service

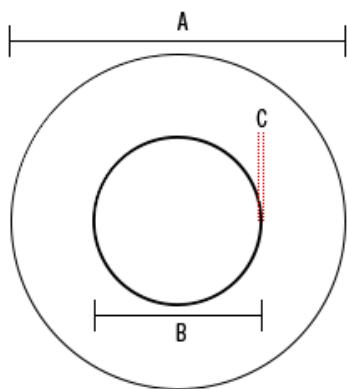

**Termination
Technology Ltd**
Quality and Service

The company with the **RIGHT** connections at the **RIGHT** price.

Company Registration Number: 05062297

W: www.termtech.co.uk

T: 01179 354 900

E: sales@termtech.co.uk

Termination Technology Ltd, Unit 4C Crofts End Ind Estate, Crofts End Road,
Bristol BS5 7UW

