

LASER LINEAR

LINEAR SUSPENDED LUMINAIRE

Laser is a range of sleek monolithic luminaires suitable for suspension or surface mounting. Manufactured in extruded aluminium, offering a contemporary look for both open area and task lighting. 0-10V dimmable as standard, available with black or white finishes, Laser can be specified with opal or microprism diffusers and feature selectable wattage and colour temperature. DALI Dimmable, 3hr Emergency and DALI Addressable Emergency options also available.



Features

- 0-10V Dimmable
- 120 lm/w
- 5 Year Warranty
- Suspend or Surface Mount
- Sleek Design

Specification

| Code | Description | Lumen Output | Emergency Lumen Output | Wattage | Efficacy |
|-------------|--------------------------------------|--------------------------|------------------------|-----------------|----------|
| LAS4P/W/CCT | Laser Linear 1200mm 4800lm 40W White | 2880lm 3840lm 4800lm | | 24W 32W 40W | 120 lm/W |

Product Information

| | |
|-------------------------|--------------------|
| Warranty | 5 Years |
| On-Site Warranty | 2 Years |
| Colour Appearance (CCT) | 3000K 4000K |
| IP Rating | IP40 |
| IK Rating | IK03 |
| Voltage | 200-240V |
| Material (Body/Housing) | Extruded Aluminium |

| | |
|---------------------|----------------|
| Colour Finish | White RAL9016 |
| LED Life Expectancy | 85,000 Hours |
| Power Factor | >0.9 |
| Frequency | 50/60Hz |
| Driver Type | 0-10V Dimmable |
| Approval | UKCA CE |
| Electrical Class | Class I |

| | |
|---------------------------|---------------|
| Material (Diffuser/Cover) | Polycarbonate |
| Colour Rendition (CRI) | Ra >80 |

| | |
|---------------------|----------------|
| Working Temperature | -20°C to +40°C |
|---------------------|----------------|

SURFACE & SUSPENDED

SPECIFICATION SHEET






LASER LINEAR

LINEAR SUSPENDED LUMINAIRE

Packaging Information

| | |
|-------------------------|----------------------------|
| Dimensions (mm) | L: 1200 x W: 60 x D: 75 mm |
| Product Net Weight (kg) | 2.34 kg |
| Barcode | 5055807625838 |
| Box Dimensions (mm) | L: 1230 x W:65 x D: 100 mm |
| Box Gross Weight (kg) | 2.49 kg |

| | |
|--------------------------------|------------------------------|
| Units/Outer Carton | 6 |
| Outer Carton Barcode | 15055807625835 |
| Outer Carton Dimensions (mm) | L: 1250 x W: 320 x D: 150 mm |
| Outer Carton Gross Weight (kg) | 16.42 kg |

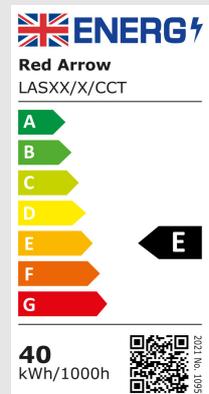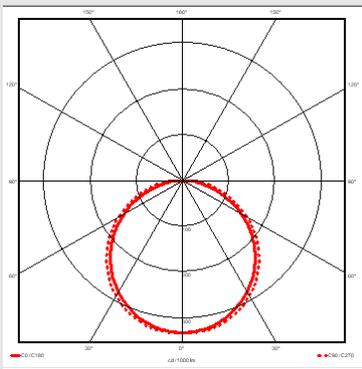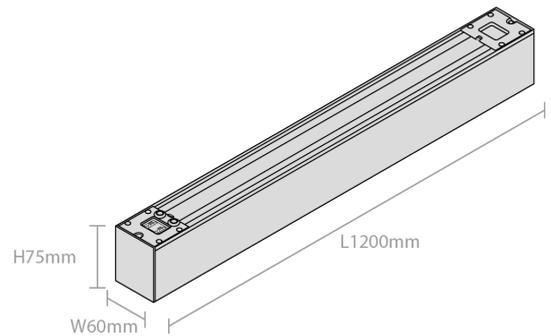

Tel: 0114 279 8999 | Email: sales@redarrowelectrical.co.uk | redarrowelectrical.co.uk

Red Arrow Electrical Ltd, Cortonwood Drive, Brampton, Barnsley, S73 0UF