

LUMO TITAN® Metal Consumer Unit Datasheet

Main Switch with Surge Protection Units

CONSTRUCTION AND FEATURES:


- With LUMO® 4-LED strip
- Surge protected consumer units
- Size options: 2, 4, 6, 10, 14, 18 ways
- Included components:
 - 1 x IS2100 dual pole isolator
 - 1 x SPD-SM1PENC2-1 Type 2 SPD
 - 1 x MD163B protective MCB for SPD
- Rigid steel construction
- Multiple knockouts all around the unit (including rear face)
- Powder coated durable off white finish
- IP3X
- Label and instruction sheet
- Accessory pack
- BS7671 Amendment 3 - regulation 421.1.201 compliant
- Raised DIN rail, with tails clamp fitment holes
- Integrated spirit level
- Captive lid screws

TECHNICAL DATA:

- Rated current: 100A
- 1 x Earthing: terminal bar (continuity to enclosure)
- 1 x Neutral terminal bar
- Busbar: 100A pin type
- Neutral cable: Insulated, copper braid, heat pressed ends
- Compatible with:
 - AF2, AFD2 AFDDs
 - ROSN, ROM RCBs
 - MD, MC, MH MCBs
 - RC2 RCDs
- Conforms to: BS EN 61439-3



DIMENSIONAL INFORMATION:

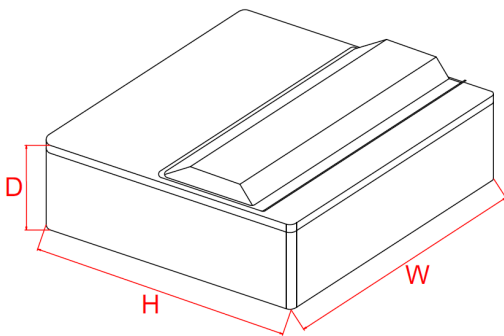

Part No	No of spare ways	H (mm)	W (mm)	D (mm)
LUMO-2/SP	2	240	160	114
LUMO-4/SP	4	240	232	114
LUMO-6/SP	6	240	232	114
LUMO-10/SP	10	240	304	114
LUMO-14/SP	14	240	376	114
LUMO-18/SP	18	240	448	114