

This document must be retained for future reference.

It is the responsibility of the person installing the electrical equipment to ensure that the installation meets the requirements of the IET wiring regulations and is therefore 'fit for purpose'. Factors such as correct selection of components, cable sizing, protective devices and Earth bonding are all critical and should be checked prior to full testing and power-up. Any other regulations applicable to the equipment being installed such as the Machinery Directive and current health and safety legislation must also be adhered to.

All connections (including factory made) must be checked for the correct tightness prior to commissioning of the electrical installation.
All connections should also be inspected periodically to ensure correct tightness.


DO NOT USE POWER TOOLS ON THESE PRODUCTS



ABS Enclosures with Din Rail

Features & Benefits

- IP67 ABS Enclosure
- IK08 Impact Tested
- 35mm x 7.5mm Din Rail Supplied
- Heavy Duty Screw Type Enclosure
- Material made from ABS UL94-HB
- Gasket Supplied
- Operating Temperature from -40°C to +85°C
- Rugged and Heavy Duty

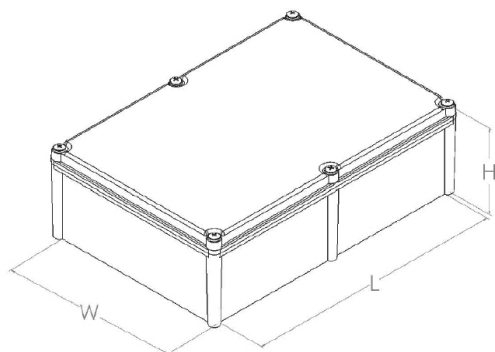

Part Number	L (mm)	W (mm)	H (mm)	Din Rail Length (mm)
CPB12127D	125	125	75	112
CPB121210D	125	125	100	112
CPB1387D	130	80	70	118
CPB17127D	175	125	70	164
CPB171210D	175	125	100	164
CPB201513D	200	150	130	182
CPB202010D	200	200	100	182
CPB202013D	200	200	130	182
CPB281913D	280	190	130	251