


ROBUS®

FLEXI-STRIPS

VEGAS COB RGBW

14W/m 24V, IP20, IP67,

3000K, 4000K

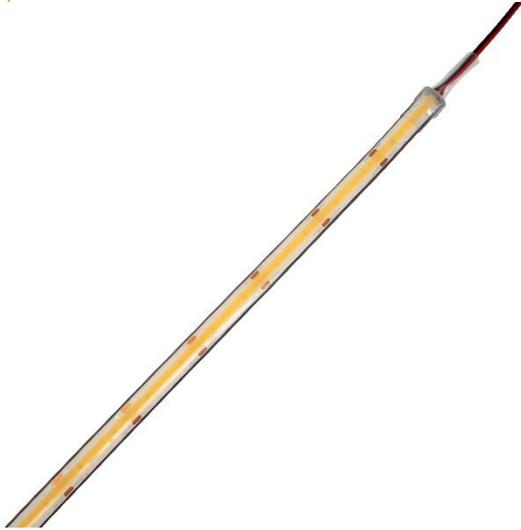

PRODUCT INFORMATION DOCUMENT

FEATURES

- Supplied in 20m reels
- RGB + 3000K or 4000K white options available
- IP20 and IP67 versions for indoor and outdoor applications
- Maximum power consumption of 14W/m, 3.5W/m for white only
- Can be cut every 3.5cm and reconnected as required. Cut-And-Connect service available through our Emergency Conversions Unit
- Choose from wide range of power supplies to match the length of used striplight
- Remote and wall mounted controllers available as accessories

CONSTRUCTION

- FPC copper substrate PCB
- 1000mm 2x18AWG input wires



Product Code:	IP20	IP67
3000K	RVCRGBW20-30	RVCRGBW67-30
4000K	RVCRGBW20-40	RVCRGBW67-40
Comparable to:	NA	NA
Total Power (W):	14/14	14/14
Total Power White Only (W):	3.5/3.4	3.5/3.4
Power Factor:	NA	NA
Total Light Output (lm):	290/290	240/240
Total Emergency Light Output (lm):	NA	NA
Efficacy (lm/cctW):	83/85	69/71
Lux at 1m (lux):	120	120
Emergency Lux at 1m (lux):	NA	NA
CCT (K):	3000/4000	3000/4000
CRI:	80	80
IP:	20	67
Operation Temperature (°C):	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40
Inrush Current:	NA	NA
RG Value:	0	0
SDCM:	6	6
P _{ST} LM:	NA	NA
SVM:	NA	NA
Energy Class:	G/G	G/G
Rated Life to L70B50 (Hrs):	50000	50000
Dimensions LxWxH (mm):	20000x12x2	20000x15x5.5
Weight (kg):	0.75	1.5

Separate Control Gear Information		
Type of Light Source:	LED	LED
Full Load Efficiency (%):	NA	NA
P _{NET} (W):	NA	NA
Dimensions (mm):	NA	NA

Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
 UK: TEL: 0800 973 220
 AUS: TEL: +61 7 3890 5444
 NZ: TEL: +64 03 668 5285

WEB: ROBUS.COM
 WEB: ROBUS.COM
 WEB: ROBUS.COM.AU
 WEB: ROBUSLED.CO.NZ

LED GROUP EUROPE · UK · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA

VEGAS COB RGBW

14W/m 24V, IP20, IP67,
3000K, 4000K

Cone Illuminance Diagram


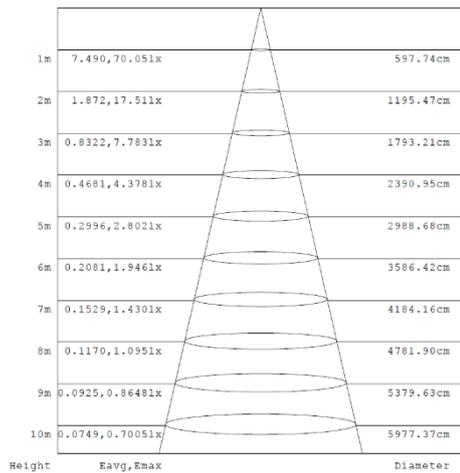


Diagram for RVCRGBW20-40 in 4000K. Other diagrams available on request

Dimension Diagram

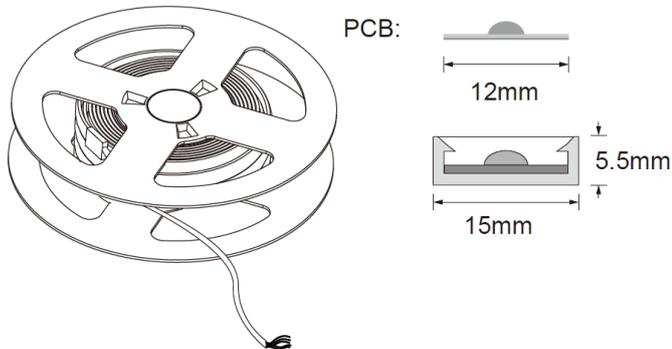

Sensor Data

Time Off Delay:	NA
Illuminance Switching Range:	NA
Sensitivity Range (%):	NA
Mounting Height (max):	NA
Detection Zone Diameter (max):	NA

Polar Intensity Diagram

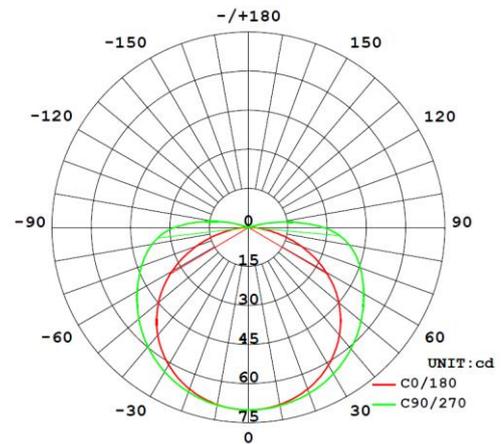


Diagram for RVCRGBW20-40 in 4000K. Other diagrams available on request

Accessories