

## ATRAF/CCT


3W IP54 CCT 240V Dimmable LED  
Square Low Level Light

# TRAFALGAR™

## PRODUCT FEATURES

- IP54 Rated
- 3W LED
- CCT Selectable (3000K/4000K/6000K)
- Opal Polycarbonate Lens
- Ideal For Stair & Plinth Lighting
- Ultra Slim Profile
- Strong Polycarbonate Body
- Mains Dimmable (ADIM/150W Recommended)
- Paintable Polar White Finish Bezel
- Fixings Included
- Clip-On Carbon Black & Stainless Steel Bezels Available\*
- Screwless Bezel Design
- Fits In A 35mm Galvanised Metal & Dry Lining Box


Scan For  
Instructions

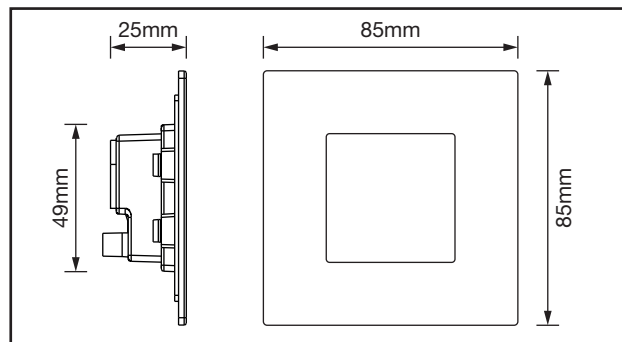


## TECHNICAL SPECIFICATIONS

| Product Code                       | ATRAF/CCT                   |       |       |
|------------------------------------|-----------------------------|-------|-------|
| Luminous Flux (LM)                 | 186lm                       | 206lm | 197lm |
| Useful Luminous Flux (LM)          | 186lm                       | 206lm | 197lm |
| CCT (Kelvin)                       | 3000K                       | 4000K | 6000K |
| Beam Angle (°)                     | 110°                        |       |       |
| SDCM                               | <6                          |       |       |
| CRI                                | >80                         |       |       |
| Peak Intensity (cd)                | 72cd                        | 77cd  | 74cd  |
| Operating Voltage (V)              | 220-240V AC                 |       |       |
| Max Output Power (W)               | 3W                          |       |       |
| Operating Current (A Max)          | 0.012A                      |       |       |
| Standby Power (W)                  | 0                           |       |       |
| Mounting Method                    | Standard Back Box           |       |       |
| Power Factor (Pf)                  | >0.9                        |       |       |
| Class                              | II                          |       |       |
| Body Material                      | Polycarbonate               |       |       |
| Frame Colour                       | Polar White                 |       |       |
| Switching Cycles                   | 50,000                      |       |       |
| Ingress Protection                 | IP54 (Indoor use only)      |       |       |
| Ambient Operating Temperature (°C) | -20°C ~ +40°C               |       |       |
| Input Frequency (Hz)               | 50/60Hz                     |       |       |
| Guarantee                          | 2 Years                     |       |       |
| Dimmable                           | Yes (ADIM/150W Recommended) |       |       |
| Dimming Mode (Trailing or Leading) | Trailing and Leading        |       |       |
| Cable Length                       | 185mm                       |       |       |
| Lifetime (L70 B50)                 | 50,000 Hrs                  |       |       |
| Displacement Factor                | ≥0.9                        |       |       |
| Flicker Metric (PstLM)             | ≤1.0                        |       |       |
| Stroboscopic Effect Metric (SVM)   | ≤0.4                        |       |       |

## ACCESSORIES\*



**Carbon Black Bezel\***  
ATRAF/BZ/BLK



**Stainless Steel Bezel\***  
ATRAF/BZ/SS



\*Sold Separately