


Modular Contactor Datasheet

MODC2/20

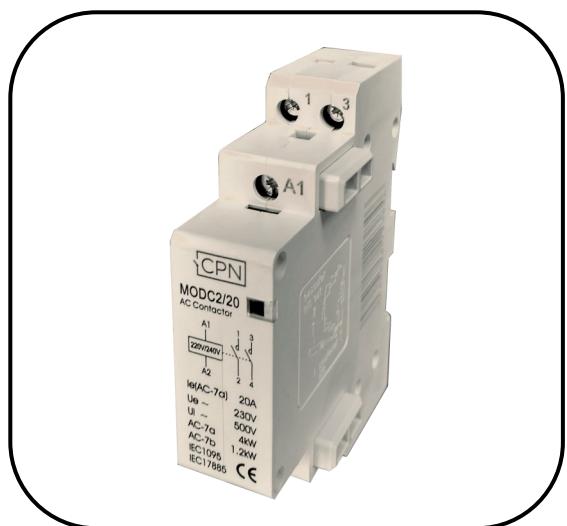


CONSTRUCTION AND FEATURES:

- Compact design
- Contact indication window
- DIN rail mounting
- Hum free operation
- Fits standard enclosures and consumer units
- Ideal for switching loads
- Bi-directional
- Recommended that space is left between adjacent contactors (spacer supplied)

TECHNICAL DATA:

- Operating coil voltage: 220/240 V AC, 50/60Hz
- Rated contact voltage: 250V
- Rated current:
 - AC1/AC-7a: 20A
 - AC7b: 7A
- kW rating:
 - AC1/AC-7a: 4kW
 - AC7b: 1.2kW
- Contact configuration: 2x NO
- Insulation voltage: 500V
- Max. cable size: 4mm²
- Conforms to: IEC 61095

WIRING DIAGRAM:

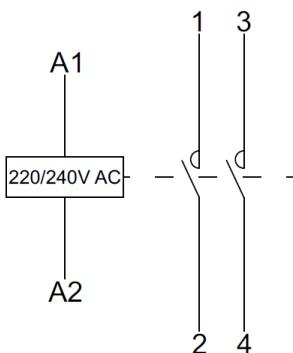

DIMENSIONAL SKETCH:

