

# Modular Contactor Datasheet

## MODC4/20




### CONSTRUCTION AND FEATURES:

- Compact design
- Contact indication window
- DIN rail mounting
- Hum free operation
- Fits standard enclosures and consumer units
- Ideal for switching loads
- Bi-directional
- Recommended that space is left between adjacent contactors

### TECHNICAL DATA:

- Operating coil voltage: 220/240 V AC, 50/60Hz
- Rated contact voltage: 400V
- Rated current:
  - AC1/AC-7a: 20A
  - AC7b: 7A
- kW rating:
  - AC1/AC-7a: 4.0kW
  - AC7b: 1.2kW
- Contact configuration: 4x NO
- Insulation voltage: 500V
- Max. cable size: 10mm<sup>2</sup>
- Conforms to: BS EN 61095

### WIRING DIAGRAM:

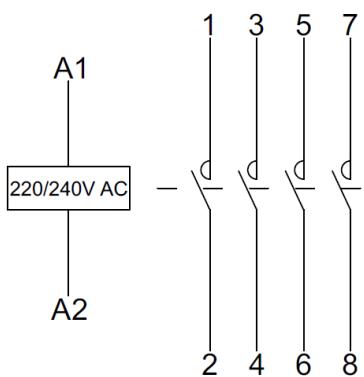

### DIMENSIONAL SKETCH:

